


Operating Guide


VRB2, VRB 3, VRG 2, VRG 3 DN 15-50




MAINTENANCE
FREE




VRB 2, VRG 2 (DN 15-50)



VRB 3, VRG 3 (DN 15-50)





AMV(E) 335, 435




AMV(E) 25 (SU/SD), 35 +
adapter **065Z0311**



AMV(E) 438 SU



IP 54
AMV(E) 438 SU
AMV(E) 25 (SU/SD), 35



IP 54
AMV(E) 335/435



MADE IN SLOVENIA	
Code:	Name:
DN:	Kvs: PT 24
PN:	T: 2...130°C
Date:	


VRB 2, VRB 3, VRG 2, VRG 3



MADE IN SLOVENIA		
Code: _____	Name: _____	
DN: _____	Kvs: _____	PT 24
PN: _____	T: 2...130°C	
Date: _____		







VRB 2, VRB 3
CuSn5ZnPb (Rg5)

P_{max} (bar)

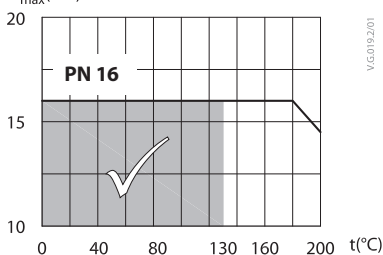

VRG 2, VRG 3
EN-GJL-250 (GG-25)


P_{max} (bar)

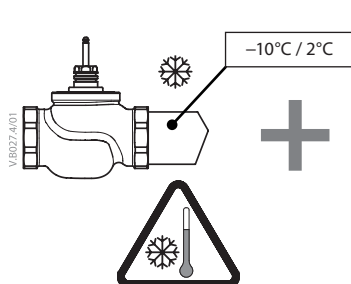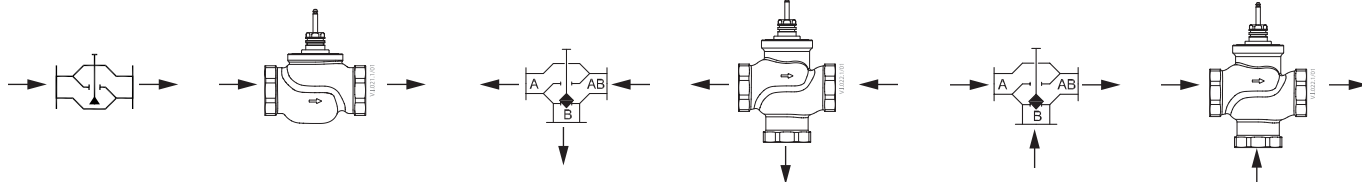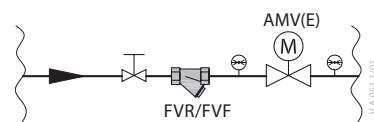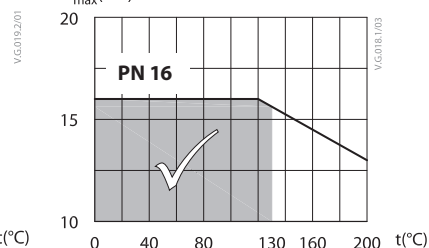

Stem heater 065Z0315


DN	Actuators
15-50	AMV(E) 335
	AMV(E) 435
	AMV(E) 438 SU
	AMV(E) 25 (SU/SD) + adapter
	AMV(E) 35 + adapter

VRB 2, VRB 3, VRG 2, VRG 3

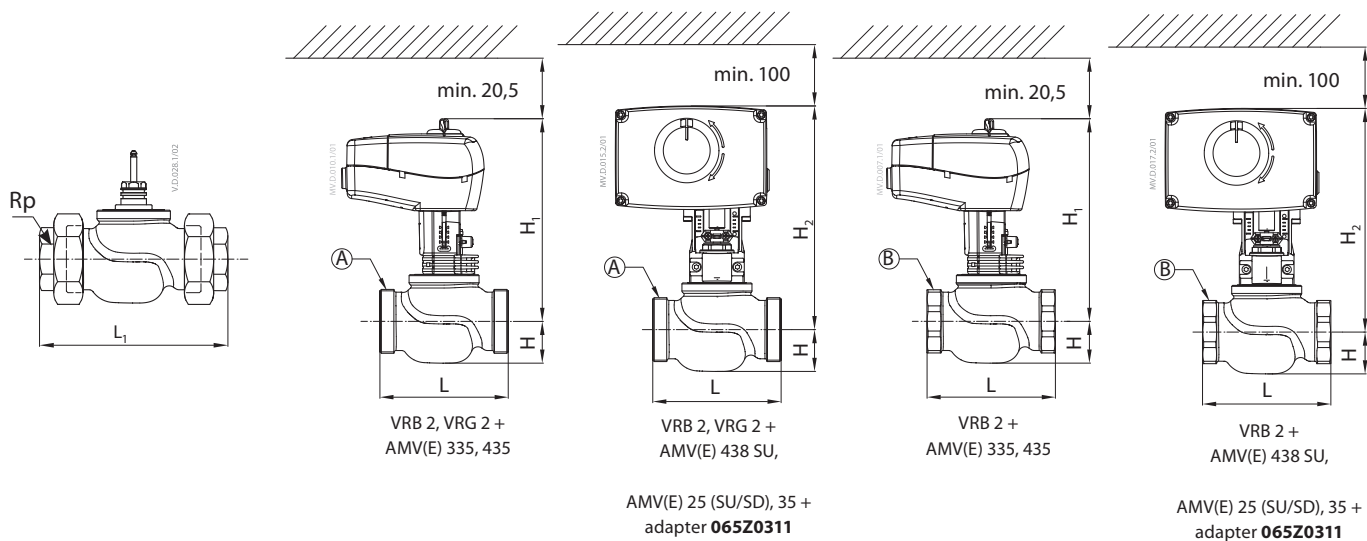

Type	DN	Rp ¹⁾	G ²⁾	L	L ₁	H	H ₁	H ₂
				mm				
VRB 2 VRG 2	15	½	1	80	128	25	191	216
	20	¾	1¼	80	128	29	194	218
	25	1	1½	95	151	29	197	222
	32	1¼	2	112	178	35	202	226
	40	1½	2¼	132	201	43	213	237
	50	2	2¾	160	234	47	217	242

1) *Rp* EN 10226-1
2) *G* DIN ISO 228/01

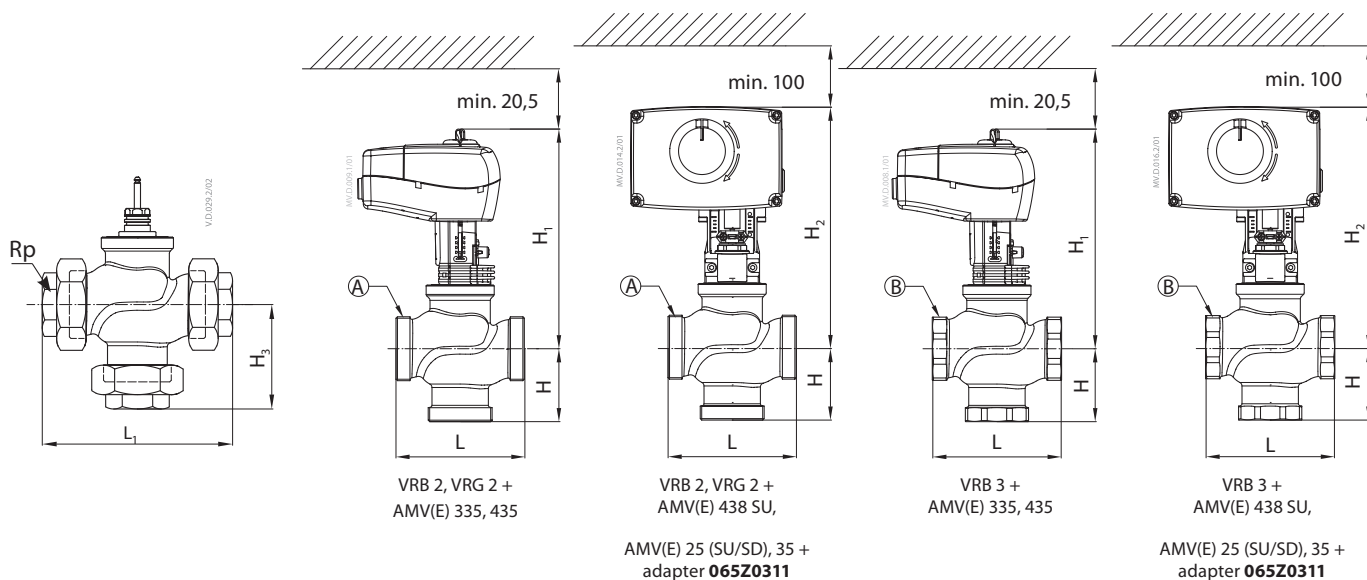

Type	DN	Rp ¹⁾	G ²⁾	L	L ₁	H	H ₁	H ₂	H ₃
				mm					
VRB 3 VRG 3	15	½	1	80	128	40	191	216	64
	20	¾	1¼	80	128	45	194	218	69
	25	1	1½	95	151	50	197	222	78
	32	1¼	2	112	178	58	202	226	91
	40	1½	2¼	132	201	75	230	255	110
	50	2	2¾	160	234	83	243	268	120

¹⁾ Rp EN 10226-1
²⁾ G DIN ISO 228/01

