


## Geberit Silent-PP pipe with one socket

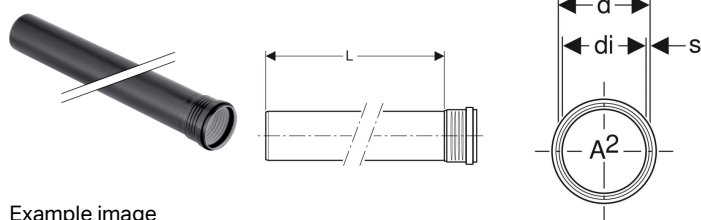

Example image

### Application purposes

- For draining off waste water within buildings

### Characteristics

- Acoustically optimised
- Three-layer pipe
- Pipe, white interior

- Seal made of EPDM
- Suitable for being stored outside for two years

### Technical data

Installation temperature (°C) - min. to max.	-10 – +40 °C
Product material	PP-C / PP-MD / PP-C
Thermal expansion (mm/(m·K))	0.08 mm/(m·K)

Art. no.	DN / nominal width	d, $\varnothing$ / outer diameter (mm)	di, $\varnothing$ / inner diameter (mm)	s / wall thickness (mm)	L / length (cm)	A <sup>2</sup> / clear cross-sectional area (cm <sup>2</sup> )
390.004.14.1	30	32 mm	28 mm	2 mm	100 cm	6.2 cm <sup>2</sup>
390.104.14.1	40	40 mm	36 mm	2 mm	100 cm	10.2 cm <sup>2</sup>
390.204.14.1	50	50 mm	46 mm	2 mm	100 cm	16.6 cm <sup>2</sup>
390.304.14.1	70	75 mm	69.8 mm	2.6 mm	100 cm	38.3 cm <sup>2</sup>
390.404.14.1	90	90 mm	83.8 mm	3.1 mm	100 cm	55.2 cm <sup>2</sup>
390.504.14.1	100	110 mm	102.8 mm	3.6 mm	100 cm	83 cm <sup>2</sup>
390.604.14.1	125	125 mm	116.6 mm	4.2 mm	100 cm	106.8 cm <sup>2</sup>
390.704.14.1	150	160 mm	149.6 mm	5.2 mm	100 cm	175.8 cm <sup>2</sup>
390.005.14.1	30	32 mm	28 mm	2 mm	150 cm	6.2 cm <sup>2</sup>
390.105.14.1	40	40 mm	36 mm	2 mm	150 cm	10.2 cm <sup>2</sup>
390.205.14.1	50	50 mm	46 mm	2 mm	150 cm	16.6 cm <sup>2</sup>
390.305.14.1	70	75 mm	69.8 mm	2.6 mm	150 cm	38.3 cm <sup>2</sup>
390.405.14.1	90	90 mm	83.8 mm	3.1 mm	150 cm	55.2 cm <sup>2</sup>
390.505.14.1	100	110 mm	102.8 mm	3.6 mm	150 cm	83 cm <sup>2</sup>
390.605.14.1	125	125 mm	116.6 mm	4.2 mm	150 cm	106.8 cm <sup>2</sup>
390.705.14.1	150	160 mm	149.6 mm	5.2 mm	150 cm	175.8 cm <sup>2</sup>
390.006.14.1	30	32 mm	28 mm	2 mm	200 cm	6.2 cm <sup>2</sup>
390.106.14.1	40	40 mm	36 mm	2 mm	200 cm	10.2 cm <sup>2</sup>
390.206.14.1	50	50 mm	46 mm	2 mm	200 cm	16.6 cm <sup>2</sup>
390.306.14.1	70	75 mm	69.8 mm	2.6 mm	200 cm	38.3 cm <sup>2</sup>
390.406.14.1	90	90 mm	83.8 mm	3.1 mm	200 cm	55.2 cm <sup>2</sup>
390.506.14.1	100	110 mm	102.8 mm	3.6 mm	200 cm	83 cm <sup>2</sup>
390.606.14.1	125	125 mm	116.6 mm	4.2 mm	200 cm	106.8 cm <sup>2</sup>
390.706.14.1	150	160 mm	149.6 mm	5.2 mm	200 cm	175.8 cm <sup>2</sup>
390.007.14.1	30	32 mm	28 mm	2 mm	300 cm	6.2 cm <sup>2</sup>
390.107.14.1	40	40 mm	36 mm	2 mm	300 cm	10.2 cm <sup>2</sup>
390.207.14.1	50	50 mm	46 mm	2 mm	300 cm	16.6 cm <sup>2</sup>
390.307.14.1	70	75 mm	69.8 mm	2.6 mm	300 cm	38.3 cm <sup>2</sup>
390.407.14.1	90	90 mm	83.8 mm	3.1 mm	300 cm	55.2 cm <sup>2</sup>

Art. no.	DN / nominal width	d, $\varnothing$ / outer diameter (mm)	di, $\varnothing$ / inner diameter (mm)	s / wall thickness (mm)	L / length (cm)	A <sup>2</sup> / clear cross-sectional area (cm <sup>2</sup> )
390.507.14.1	100	110 mm	102.8 mm	3.6 mm	300 cm	83 cm <sup>2</sup>
390.607.14.1	125	125 mm	116.6 mm	4.2 mm	300 cm	106.8 cm <sup>2</sup>
390.707.14.1	150	160 mm	149.6 mm	5.2 mm	300 cm	175.8 cm <sup>2</sup>