


**Geberit Silent-PP duct branch fitting 87.5°, swept-entry, left**



Example image

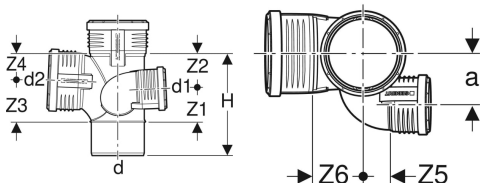

**Application purposes**

- For draining off waste water within buildings

**Characteristics**

- Acoustically optimised
- Swept entry

- Seal made of EPDM

**Technical data**

Installation temperature (°C) - min. to max.	-10 – +40 °C
Product material	PP-MD
Thermal expansion (mm/(m·K))	0.08 mm/(m·K)

Art. no.	DN / nominal width	inner diameter (mm)	outer diameter (mm)	flange outer diameter (mm)	flange outer diameter (mm)	flange angle (°)	flange partial dimension (cm)	flange height (cm)	Z1 / Z-dim n (cm)	Z2 / Z-dim n (cm)	Z3 / Z-dim n (cm)	Z4 / Z-dim n (cm)	Z5 / Z-dim n (cm)	Z6 / Z-dim n (cm)
390.464.14.1	90 / 70	90 mm	75 mm	90 mm	90 mm	87.5 °	8.2 cm	17.6 cm	6.3 cm	5.3 cm	6.7 cm	4.9 cm	3.5 cm	6.9 cm
390.564.14.1	100 / 70	110 mm	75 mm	110 mm	110 mm	87.5 °	9.2 cm	21.1 cm	6.7 cm	7.6 cm	8.2 cm	6.1 cm	4.4 cm	7.7 cm