


Geberit Silent-PP corner branch fitting 87.5°



Example image

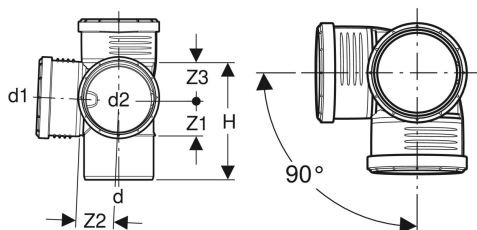

Application purposes

- For draining off waste water within buildings

Characteristics

- Acoustically optimised
- Seal made of EPDM

Technical data

Installation temperature (°C) - min. to max.	-10 – +40 °C
Product material	PP-MD
Thermal expansion (mm/(m·K))	0.08 mm/(m·K)

Art. no.	DN / nominal width	d, ø / outer diameter (mm)	d1, ø / outer diameter (mm)	d2, ø / outer diameter (mm)	arc / angle (°)	H / height (cm)	Z1 / Z-dimension (cm)	Z2 / Z-dimension (cm)	Z3 / Z-dimension (cm)
390.459.14.1	90	90 mm	90 mm	90 mm	87.5 °	15.7 cm	4.6 cm	5 cm	5 cm
390.559.14.1	100	110 mm	110 mm	110 mm	87.5 °	18.6 cm	5.6 cm	6 cm	6.1 cm
390.662.14.1	125 / 100	125 mm	110 mm	110 mm	87.5 °	21.3 cm	6.6 cm	7.8 cm	7.3 cm