


Geberit Silent-PP connection bend 90°, extended

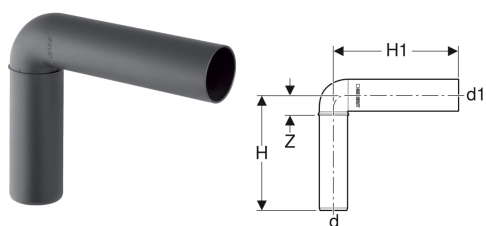

Example image

Application purposes

- For draining off waste water within buildings

Characteristics

- Acoustically optimised

Technical data

Installation temperature (°C) - min. to max.	-10 – +40 °C
Product material	PP-MD
Thermal expansion (mm/(m·K))	0.08 mm/(m·K)

Scope of delivery

- Protective cap

Art. no.	DN / nominal width	d, ø / outer diameter (mm)	d1, ø / outer diameter (mm)	arc / angle (°)	H / height (cm)	H1 / height (cm)	Z / Z-dimension (cm)
390.286.14.1	50	50 mm	46 mm	90 °	16 cm	20 cm	10.9 cm
390.287.14.1	50	50 mm	58 mm	90 °	16 cm	20 cm	10.9 cm

Accessories

- Geberit sleeve
- Geberit sleeve