


Geberit Silent-PP combined corner branch fitting 87.5°, swept-entry, left



Example image

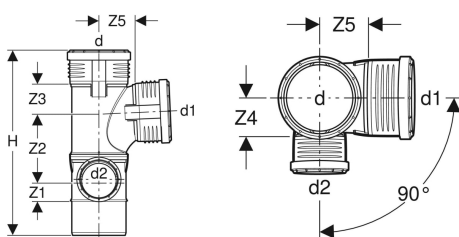

Application purposes

- For draining off waste water within buildings
- For connecting low-lying drains on shower elements

Characteristics

- Acoustically optimised

- Swept entry
- Seal made of EPDM

Technical data

Installation temperature (°C) - min. to max.	-10 – +40 °C
Product material	PP-MD
Thermal expansion (mm/(m·K))	0.08 mm/(m·K)

Art. no.	DN / nominal width	Ø / outer diameter (mm)	Ø / outer diameter (mm)	Ø / outer diameter (mm)	angle / height (°)	Z1 / Z-dimension (cm)	Z4 / Z-dimension (cm)	Z5 / Z-dimension (cm)	Z6 / Z-dimension (cm)	Z7 / Z-dimension (cm)	Z8 / Z-dimension (cm)
390.470.14.1	90 / 50	90 mm	90 mm	50 mm	87.5 °	30.6 cm	3.2 cm	10.9 cm	5.2 cm	4.9 cm	6.7 cm
390.561.14.1	100 / 70	110 mm	110 mm	75 mm	87.5 °	37.5 cm	4.2 cm	13.8 cm	6.5 cm	6 cm	7.8 cm
390.570.14.1	100 / 90 / 50	110 mm	90 mm	50 mm	87.5 °	32.4 cm	3.3 cm	11.1 cm	5.4 cm	5.9 cm	7.8 cm
390.578.14.1	100 / 50	110 mm	110 mm	50 mm	87.5 °	35 cm	3.3 cm	12.6 cm	6.5 cm	5.9 cm	7.4 cm