


Geberit Silent-PP reducer, eccentric, short



Example image

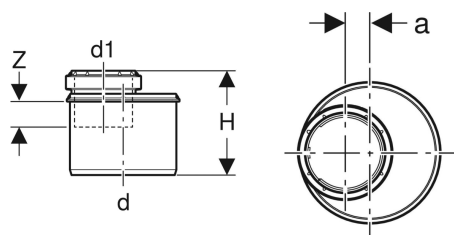

Application purposes

- For draining off waste water within buildings

Characteristics

- Eccentric
- Acoustically optimised

- Seal made of EPDM

Technical data

Installation temperature (°C) - min. to max.	-10 – +40 °C
Product material	PP-MD
Thermal expansion (mm/(m·K))	0.08 mm/(m·K)

Art. no.	DN / nominal width	d, ø / outer diameter (mm)	d1, ø / outer diameter (mm)	a / partial dimension (cm)	H / height (cm)	Z / Z-dimension (cm)
390.373.14.1	70 / 50	75 mm	50 mm	1 cm	8.4 cm	2.3 cm
390.474.14.1	90 / 50	90 mm	50 mm	1.7 cm	8.8 cm	2.4 cm
390.475.14.1	90 / 70	90 mm	75 mm	0.4 cm	8.9 cm	2.8 cm
390.575.14.1	100 / 50	110 mm	50 mm	2.6 cm	9.5 cm	2.4 cm
390.576.14.1	100 / 70	110 mm	75 mm	1.4 cm	9.6 cm	2.9 cm
390.577.14.1	100 / 90	110 mm	90 mm	0.6 cm	9.8 cm	3.2 cm