


## Geberit retaining claw

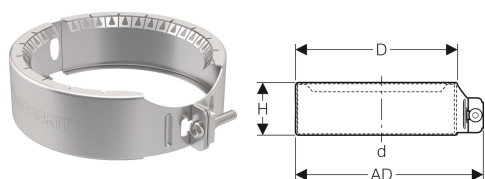

Example image

### Application purposes

- For Geberit Silent-PP
- For rainwater pipes
- For creating lengthways locked push-in connections
- For building drainage

### Characteristics

- Can be retrofitted
- Removable

### Technical data

Internal pressure (bar) - max.	2 bar
Product material	CrNi steel 1.4301 (EN 10088)

Art. no.	DN / nominal width	d, ø / outer diameter (mm)	AD / connecting distance (cm) - min. to max.	D / outer diameter (cm)	H / height (cm)
These articles are suitable for the following system: <b>Geberit Silent-PP</b>					
390.008.14.1	30	32 mm	5.7 cm	4.5 cm	3.3 cm
390.108.14.1	40	40 mm	6.9 cm	5.7 cm	3.5 cm
390.203.14.1	50	50 mm	8.2 cm	7 cm	3.8 cm
390.308.14.1	70	75 mm	10.9 cm	9.6 cm	3.7 cm
390.408.14.1	90	90 mm	12.6 cm	11.3 cm	4.1 cm
390.508.14.1	100	110 mm	14.7 cm	13.5 cm	4.1 cm
390.608.14.1	125	125 mm	16.5 cm	15.2 cm	4.5 cm
390.708.14.1	150	160 mm	20.6 cm	19.3 cm	5 cm
These articles are suitable for the following system: <b>Geberit Silent-Pro</b>					
390.203.14.1	50	50 mm	8.2 cm	7 cm	3.8 cm
390.308.14.1	70	75 mm	10.9 cm	9.6 cm	3.7 cm
390.408.14.1	90	90 mm	12.6 cm	11.3 cm	4.1 cm
390.508.14.1	100	110 mm	14.7 cm	13.5 cm	4.1 cm
390.608.14.1	125	125 mm	16.5 cm	15.2 cm	4.5 cm
390.708.14.1	150	160 mm	20.6 cm	19.3 cm	5 cm