Geberit Gateway, Firmware-Version V09

Diese Anleitung gilt für das Firmware-Update des Geberit Gateways auf die Firmware-Version V09.

Falls ein Firmware-Update zur Verfügung steht, wird dieses in der Geberit Control App mit einem orangen Warnsymbol angezeigt.

Ein Firmware-Update erfolgt entweder über die Geberit Cloud Services oder mithilfe eines USB-Sticks.
→ Siehe nächste Seite.

→ Siehe auch Systemhandbuch zu Geberit Connect, 970.746.00.0, Kapitel „Firmware-Update durchführen“.

Release Notes zu Firmware-Version V09

- Vereinfachung der WLAN-Konfiguration
- Aktualisierung der WLAN-Treiber
- Möglichkeit zum Ändern der Namen der Endgeräte bei der Inbetriebnahme

DE

Firmware-Update mit USB-Stick

Voraussetzung

– Ein handelsüblicher USB-Stick mit FAT32-Dateisystem liegt bereit.


1 Firmware-Datei herunterladen (ca. 100 MB). Download-Link für Firmware-Version V09: https://firmwares.data.geberit.com/FwPkg_F500_Gateway_RS_09.gsi

2 Firmware-Datei (Gateway_F5_00_RS_XX.gsi) in Root-Verzeichnis des USB-Sticks kopieren. Im Root-Verzeichnis darf sich nur 1 Firmware-Datei befinden.

3 USB-Stick auf der Vorderseite des Geberit Gateways einstecken.

4 Geberit Control App mit Geberit Gateway verbinden.

✓ Die neue Firmware-Version wird mit einem Warnsymbol angezeigt.

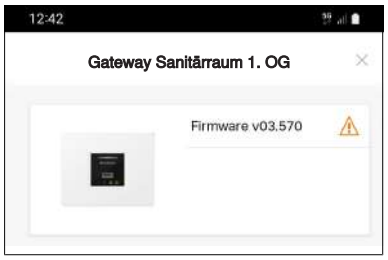

5 [Firmware] öffnen und Firmware-Update starten.

✓ Der Fortschritt des Firmware-Updates wird mit den LEDs am Geberit Gateway angezeigt.

✓ Die Verbindung zur Geberit Control App wird während des Firmware-Updates unterbrochen.

✓ Falls die Firmware-Datei auch Firmware-Updates für Geberit Connect Endgeräte enthält, werden auch diese Updates ausgeführt.

USB-Stick erst ausstecken, wenn die weisse LED Netzanschluss am Geberit Gateway nicht mehr blinkt.

Falls beim Firmware-Update Probleme auftreten, Stromzufuhr zum Geberit Gateway für ca. 10 Sekunden unterbrechen.

Alternative: Firmware-Update mit Geberit Cloud Services

Voraussetzung

– Das Geberit Gateway ist über einen Router mit dem Internet verbunden.

– Die Geberit Cloud Services sind aktiviert.

1 Geberit Control App mit Geberit Gateway verbinden.

✓ Die neue Firmware-Version wird mit einem Warnsymbol angezeigt.



2 [Firmware] öffnen und Firmware-Update starten.

✓ Die Firmware-Datei wird heruntergeladen, und das Firmware-Update startet.

✓ Der Fortschritt des Firmware-Updates wird mit den LEDs am Geberit Gateway angezeigt.

✓ Die Verbindung zur Geberit Control App wird während des Firmware-Updates unterbrochen.

✓ Falls die Firmware-Datei auch Firmware-Updates für Geberit Connect Endgeräte enthält, werden auch diese Updates ausgeführt.

630504082926668891 © 04-2026
972.341.00.0(05)

Geberit Gateway, firmware version V09

These instructions apply to updating the Geberit Gateway to firmware version V09.

When a firmware update is available, it is indicated in the Geberit Control app by an orange warning symbol.

The firmware can be updated either via Geberit Cloud Services or by using a USB flash drive. → See next page.

→ See also system manual on Geberit Connect, 970.746.00.0, “Updating firmware“ section.

Release notes for firmware version V09

- Simplification of the WLAN configuration
- Update of the WLAN drivers
- Option to change the names of end devices during commissioning

EN

Firmware update with USB flash drive

Prerequisite

– A standard USB flash drive with FAT32 file system is available.

1 Download firmware file (approx.100 MB). Download link for firmware version V09: https://firmwares.data.geberit.com/FwPkg_F500_Gateway_RS_09.gsi

2 Copy the firmware file (Gateway_F5_00_RS_XX.gsi) to the root directory of the USB flash drive. The root directory must contain only one firmware file.

3 Insert the USB flash drive into the front side of the Geberit Gateway.

4 Connect the Geberit Control app to the Geberit Gateway.

✓ The new firmware version is displayed with a warning symbol.



5 Open the [firmware] and start the firmware update.

✓ The progress of the firmware update is indicated by the LEDs on the Geberit Gateway.

✓ The connection to the Geberit Control app is interrupted during the firmware update process.

✓ If the firmware file also contains firmware updates for Geberit Connect end devices, these updates will be also performed automatically as part of the update procedure.

Only unplug the USB flash drive once the white mains connection LED on the Geberit Gateway has stopped flashing.

If problems occur during the firmware update, disconnect the power supply to the Geberit Gateway for approximately 10 seconds.

Alternative: Firmware update with Geberit cloud services

Prerequisite

– The Geberit Gateway is connected to the internet via a router.

– The Geberit Cloud Services are activated.

1 Connect the Geberit Control app to Geberit Gateway.

✓ The new firmware version is displayed with a warning sign.



2 Open [firmware] and start firmware update.

✓ The firmware file is downloaded and the firmware update starts.

✓ The progress of the firmware update is indicated by the LEDs on the Geberit Gateway.

✓ The connection to the Geberit Control app is interrupted during the firmware update.

✓ If the firmware file contains also firmware updates for Geberit Connect end devices, these updates will be also implemented.

Geberit International AG
Schachenstrasse 77, CH-8645 Jona
documentation@geberit.com
www.geberit.com

63050408292666891 © 04-2026
972.341.00.0(05)